

## Μέσα προστασίας από πτώσεις

Means of protection from falls



**COD: 112600**

**EKO 1 safety belt**

Safety belt with two links on the side and tool cases.

**COD: 112601**

**EKO 2 safety belt**

EN 361. Full-body safety belt with suspension link in the back and two links on the chest. Adjustable shoulder and thigh straps.

Appropriate for use with a tripod.



**COD: 112604**

**EKO 4 safety belt**

EN 358,361. Full-body safety belt with suspension link in the back, two links on the chest and two links in the waist. It has tool cases.

**COD: 113920**

**Waist and thigh belt**

EN 358,813. Waist belt with two links on the side. It has tool cases. It is a seat belt. Appropriate for industrial operations and rescues.






**COD: 112602**

**Safety rope**

EN 354. Safety rope (2m). It has a safety link on one side.

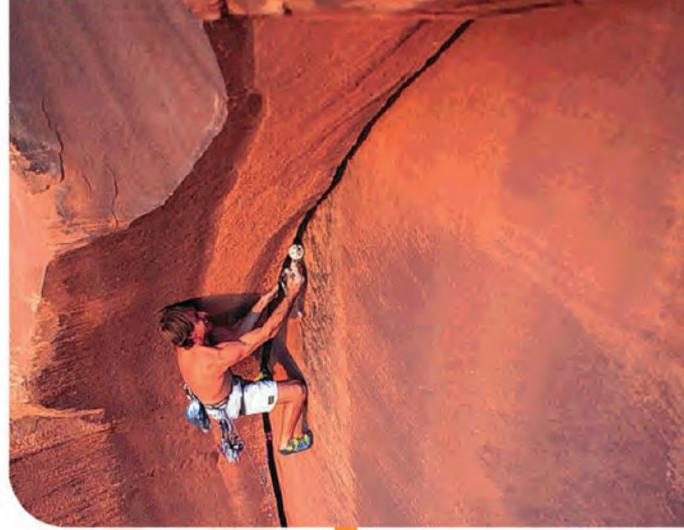

**COD: 112603**

**Safety link**

EN 362. Screwing safety link. 15kN force.  
Opening (mm): 17  
Material: steel



**COD: 119002**

**Rope energy absorber (dampener)**

Rope energy absorber (dampener)



**COD: 113921**

**Energy absorber**

EN 355. It has a 2m built-in link on both sides. Fall arrester, 44mm in width.



## Μέσα προστασίας από πτώσεις

Means of protection from falls



### **COD: 112611**

#### **Full-body Comfort safety belt**

EN 358,361,813. Full-body safety belt with a special seat for extended work. It has a wide belt with a pad and padded feet straps. It bears suspension spots on the back, the chest, the waist and on the sides of the waist and adjustable harnesses. Weight: 3kg.



### **COD: 112612**

#### **Full-body Plus safety belt**

EN 358,361,813. It has a wide belt with a pad and padded feet straps. It bears suspension spots on the back, the chest, the waist and on the sides of the waist and adjustable harnesses. Weight: 3kg.



### **COD: 112614**

#### **Full-body Gravity safety belt**

EN 358,361. Full-body safety belt with suspension spots on the back, chest and waist. Ergonomic design for ultimate comfort during use. Adjustable shoulder and thigh straps. Weight 1570 gr.

**COD: 112613**

**Seat waist best**

EN 358,813. Ability to hold in three spots.

Seat-belt. Adjustable thigh straps.



**COD: 112615**

**Full-body Vertical 2 Plus safety belt**

EN 358,361. Full-body safety belt with suspension spots on the back, chest and waist.

Adjustable shoulder and thigh straps.

Weight: 1600 gr.

**COD: 112616**

**Empire full-body safety belt**

EN 361. Full-body safety belt with suspension spots on the back and chest.

Adjustable shoulder and thigh straps.

Weight: 850 gr.



**COD: 112617**

**Easy Belt waist belt**

EN 358. Waist belt with two suspension spots on the side.

Weight: 520 gr.

## Μέσα προστασίας από πτώσεις

Means of protection from falls



**COD: 112618**

**Limited energy absorber**

EN 355. Energy absorber released during fall. Comes with a 2m rope. Adjustable on any type of safety belt.



**COD: 112607**

**Rebar safety link**

EN 362. Force: 22kN.  
Opening (mm): 50.  
Material: aluminum.



**COD: 112619**

**NEW rope energy absorber (dampener)**

EN 355. Total length: 185cm. Adjustable on any type of link.



**COD: 112620**

**Double-rope energy absorber (dampener)**

EEN 355. Total length: 200cm. Adjustable on any type of link.



**COD: 112621**

**Strap energy absorber**

EN 355. Total length: 185cm. Adjustable on any type of link.



**COD: 112622**

**NEW safety rope**


EN 354. Safety rope. Length: 190 cm.



**COD: 112623**

**Adjustable-length safety rope**

EN 358. Adjustable-length (115-200 cm) safety rope.

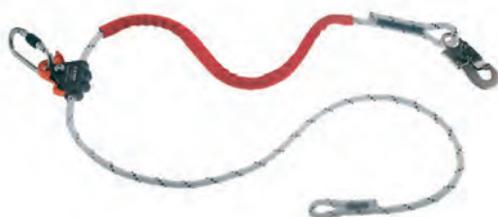

**COD: 112624**

**Adjuster safety rope**

EN 358. Has a safety link and a safety mechanism for pole workers on one end.



## Μέσα προστασίας από πτώσεις

Means of protection from falls



**COD: 112625**

**Steel safety link**

EN 362. Force: 25 kN. Opening (mm): 53.  
Length: 220mm. Weight: 470gr.



**COD: 112626**

**Inox safety link**

EN 362. Force: 20 kN. Opening (mm): 115. Length: 390mm.  
Weight: 350gr.



**COD: 112627**

**Steel screwing safety link**

EN 362. Force: 25 kN. Opening (mm): 16. Length: 108mm.  
Weight: 165gr.



**COD: 112628**

**Tripod safety link**

EN 362. Force: 23 kN. Opening (mm): 20. Length: 173mm.  
Weight: 360gr.



**COD: 112629**

**Alu safety link**

EN 362. Force: 25 kN. Opening (mm): 23. Length: 117mm.  
Weight: 87gr.



**COD: 112630**

**Camble Fall safe descent mechanism**

EN 353/1-2. Locks automatically on a up to 8mm wire rope during fall.



**COD: 112631**

**Rope Fall safe descent mechanism**

EN 353/1-2. Locks automatically on a up to 12mm rope during fall.



**COD: 112632**

**Re-reeled fall arrester (10m)**

EN 360. Uses a 10m wire rope. Appropriate for hoisting out of small wells and tanks.



**COD: 112633**

**Re-reeled fall arrester (2.5m)**

EN 360. Uses a 2.5 m strap. Automatically blocks during fall.

**COD: 112634**

**Tripod**

EN 795/B. Maximum load:500kg. Height can be adjusted from 134 to 214cm. Appropriate for lifting and descending workers



**COD: 112635**

**Whim**

EN 1496. Wire rope whim to be used with a tripod and a manual lift/descent mechanism. Maximum weight: 180 kg. Length of wire rope: 20 m.

**COD: 112636**

**Whip**

EN 12278. Adjusted on a tripod.

