


6. Type:

Wire wound

(I - Y - N	ner Name :r Number :
	Date : Completed By:
Tlexible Heater Product Data Sheet	Quantity:
Approval drawing required Part Number:	A/E:
Heater Specification: (Please check all applicable)	7. Pressure Sensitive Adhesive (PSA) [300°F continuous]
1. Shape: Round (Diameter):	8. Agency Approvals: None □ CE □ C.S.A. □
Rectangular: Length:	U.L. Component Recognized □ Other:
Width: leads exit width	9. Special Features: (Holes/Cutouts [specify size, location,]
Drum (Gallon size or diameter):	Insulation, Grounding Mesh, Factory Vulcanizing, etc)
Trapezoid/Irregular (Provide sketch or drawing):	-
2. Rating: Watts: Volts: Phase:	Operating Conditions:
3. Type of Leads: Lead Length (In):	A. Application (Describe in detail):
4. Thermostat: None □	
Adjustable(Specify temperature range):°F	
Fixed(Specify temperature):°F	Heated Medium: Gas □ Solid □ Liquid □
T/C Type: Other Sensor:	B. Application Temperature:°F
5. Material: Silicone Rubber(Std.) Other:	C. Ambient Temperature:°F

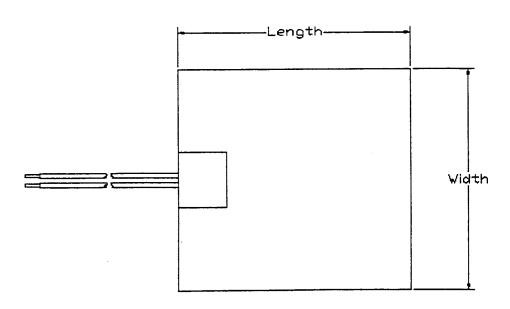

Etched Foil $\ \square$

D. Installation Environment:

Indoor \Box

Outdoor \Box